



General Description

TUBU's Surface Mounting LED bulkhead light feature rugged design and versatility to make it an excellent choice for new construction or retrofit applications. Offered in a variety of versions and color temperatures, it can replace existing Incandescent systems

Features

- Size: 325*100mm
- Voltage: AC100-AC240V / 50-60Hz
- Power: 15W PF: > 0.90
- LEDs Type: Epistar Chips SMD2835 LED
- Lumens: 1300lm (Compact Opal PC Cover)
- Beam Angle: > 120° CRI: > 80
- Material: Polycarbonate PC base + Opal PC diffuser
- 30% light on in 3hr emergency with 9.6V 1600mAh Ni-MH battery
- Microwave sensor Auto-dim: 0%-100%, 25%-100%, 0%-25%-100%
- CCT: 3000K-3500K / 4000K-4500K / 6000K-7000K Lifespan: 50,000hrs, CE-EMC,LVD & RoHS compliant
- Weatherproof: IP54
- 3 year warranty


Applications

- Office Lighting
- School Lighting
- Healthcare Lighting

Electrical and Technical Data

Model No	MG-BHLRC-15W-S	MG-BHLRC-15W-M	MG-BHLRC-15W-E	MG-BHLRC-15W-M&E
Version	Standard	Microwave	Emergency	Microwave&Emergency
Input Power	15W	15W	15W	15W
Dimension	Ø325*100mm	Ø325*100mm	Ø325*100mm	Ø325*100mm
CCT	3000K-6000K	3000K-6000K	3000K-6000K	3000K-6000K
CRI	>80	>80	>80	>80
Power Factory	>0.9	>0.9	>0.9	>0.9
IP Grade	IP54	IP54	IP54	IP54
Input Voltage	AC100~240V	AC100~240V	AC100~240V	AC100~240V
Luminous	85lm/W	85lm/W	85lm/W	85lm/W
Beam Angle	120°	120°	120°	120°
Working Temp	-20°-50°	-20°-50°	-20°-50°	-20°-50°
Warranty	3 Years	3 Years	3 Years	3 Years
Lifespan	50000H	50000H	50000H	50000H

Product Dimension&Package Details

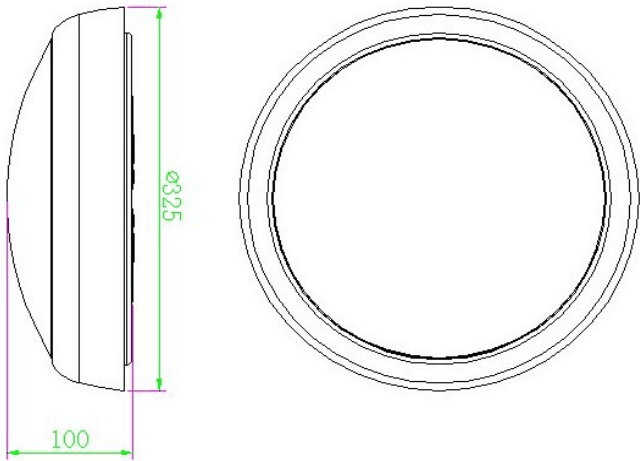

Model	Diameter(Norm)	Height(Norm)	N.W/PC	G.W/PC	Qty/CTN	Size/CTN
MG-BHLRC-15W	325mm	100mm	11.0KG	11.8KG	5PCS/CTN	570*360*370mm