


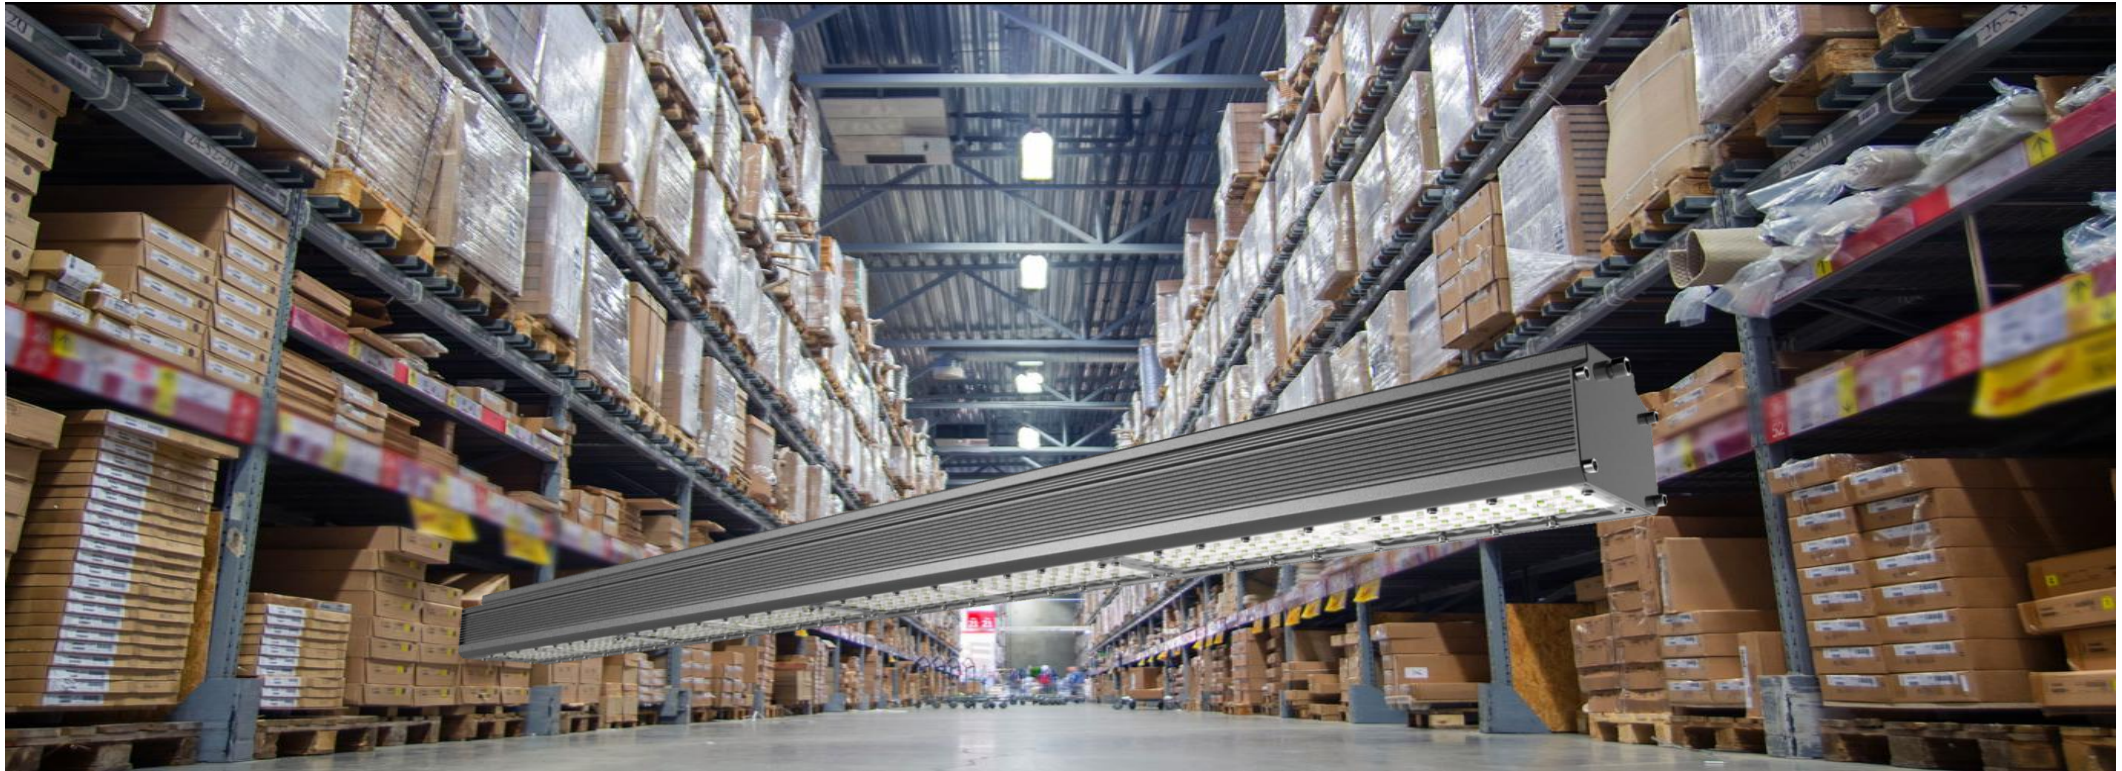

General Description

TUBU'S brand NEW LED warehouse Linear High bay G3 is designed to replace traditional HID and HIF in a variety of applications, especially suited for warehouses. Adopt the most advanced LM80 / TM21 certified Phillips chips and UL listed Meanwell LED driver. TUBU uses innovative optics and thermally efficient design, that enables the fittings to exceed 130lm/W. Combined with dimmable versions, 1-10V, DALI system and sensors, zigbee intelligent control, TUBU's new linear high bay will help you save up to 80% in energy savings. It is available in 80W, 120W, 150W, 180W and more options suitable for installation up to 16m or higher.

Features

- High Output LED's,up to 130m/W, Phillips Lumileds 3030
- High CRI >80
- UL listed Meanwell driver,High PF>0.96 low THD driver,Flicker free
- Environmentally friendly, no mercury, No UV, No IR
- 3 Beam angles option: 40°/90°/ 80°X155°
- IP65 rated; for indoor&outdoor use
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE,RoHs,ETL,DLC
- Body: Aluminium alloy
- Stainless steel screws
- Options:
 - 1-10V, Microwave sensor, daylight sensor options



Applications

- Workshops
- Warehouse
- Storage

Electrical and Technical Data

Model No	Input Power	Dimension	CCT	CRI	Power Factor	IP Grade	Input Voltage	luminous efficacy	Beam Angle	Dimmable	Lifespan	ETL	DLC
LHB-80W	80W	577mm	4000K & 5700K	>80	>0.9	IP65	100-277VAC	130lm/W	40°/90°/ 80°X155°	/	50,000hrs	YES	/
LHB-80W-D	80W	577mm	4000K & 5700K	>80	>0.9	IP65	100-277VAC	130lm/W	40°/90°/ 80°X155°	1-10V	50,000hrs	YES	/
LHB-100W	100W	858mm	4000K & 5700K	>80	>0.9	IP65	100-277VAC	130lm/W	40°/90°/ 80°X155°	/	50,000hrs	YES	/
LHB-100W-D	100W	858mm	4000K & 5700K	>80	>0.9	IP65	100-277VAC	130lm/W	40°/90°/ 80°X155°	1-10V	50,000hrs	YES	/
LHB-150W	150W	1139mm	4000K & 5700K	>80	>0.9	IP65	100-277VAC	130lm/W	40°/90°/ 80°X155°	/	50,000hrs	YES	YES
LHB-150W-D	150W	1139mm	4000K & 5700K	>80	>0.9	IP65	100-277VAC	130lm/W	40°/90°/ 80°X155°	1-10V	50,000hrs	YES	YES
LHB-150W-H	150W	1139mm	4000K & 5700K	>80	>0.9	IP65	180~480VAC	130lm/W	40°/90°/ 80°X155°	/	50,000hrs	YES	/
LHB-150W-DH	150W	1139mm	4000K & 5700K	>80	>0.9	IP65	180~480VAC	130lm/W	40°/90°/ 80°X155°	1-10V	50,000hrs	YES	/
LHB-180W	180W	1420mm	4000K & 5700K	>80	>0.9	IP65	100-277VAC	130lm/W	40°/90°/ 80°X155°	/	50,000hrs	YES	YES
LHB-180W-D	180W	1420mm	4000K & 5700K	>80	>0.9	IP65	100-277VAC	130lm/W	40°/90°/ 80°X155°	1-10V	50,000hrs	YES	YES


Product Dimension&Package Details

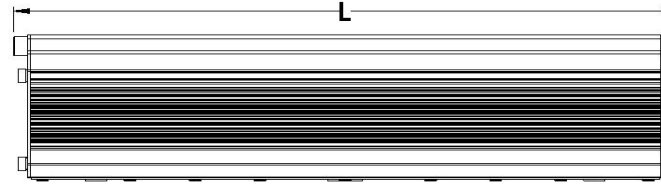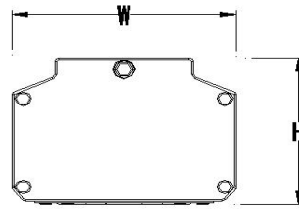

Model	L(Norm)	W(Norm)	H(Norm)	N.W/PC	G.W/PC	Qty/CTN	Size/CTN
LHB-80W	577mm	100mm	77mm	3.04KG	3.5KG	4pcs	600x285x240mm
LHB-120W	858mm	100mm	77mm	4.42KG	5.0KG	4pcs	880x285x240mm
LHB-150W	1139mm	100mm	77mm	5.55KG	6.0KG	2pcs	1161x285x126mr
LHB-180W	1420mm	100mm	77mm	6.65KG	7.0KG	2pcs	1432x285x126mr

Installation

1. PENDENT MOUNT

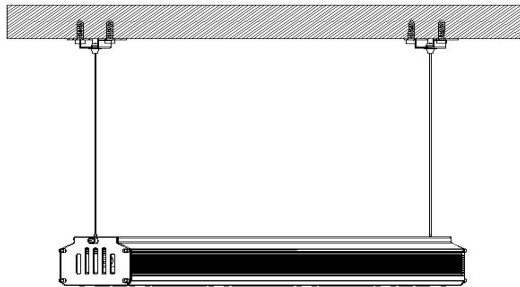

2. SURFACE MOUNT

