

General Description

TUBU'S IP65 Easy-install LED Tri-proof Light L8 are an ideal solution for both wet and dry locations such as parking garages and warehouses as well as factory production areas, basements and storage areas. They are available in lengths from 600mm to 1500mm 20W/30W/40W/50W/60W with both surface mount and suspended mount options.

Features

- **Fast Fit Easy Install**
- System efficiency up to **130lm/W & 150lm/W**
- High CRI >80
- UGR<19 options
- Environmentally friendly, no mercury, No UV, No IR
- Wide beam angle 120°
- IP65 waterproof, dust, corrosion and pressure-proof; for indoor use
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- PC housing + PC cover+ Aluminium inside
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHS Certified


Applications

- Car parking Lighting
- School Lighting
- Workshops
- Supermarket
- Warehouse
- Storage

Electrical and Technical Data

Model No	TBL82F-20W	TBL84F-40W	TBL85F50W	TBL85F60W
Input Power	20W	40W	50W	60W
Dimension	623*75*63mm	1223*75*63mm	1523*75*63mm	1523*75*63mm
CCT	4000K & 5000K & 6000K			
CRI	>80			
Power Factor	>0.9			
IP Grade	IP65			
Input Voltage	AC200-240VAC (50/60Hz)			
Luminous	130lm/W			
Beam Angle	120°			
Working Temp	-20°~45° C			
Warranty	5 Years			
L90	>54,000hrs			


Product Dimension&Package Details

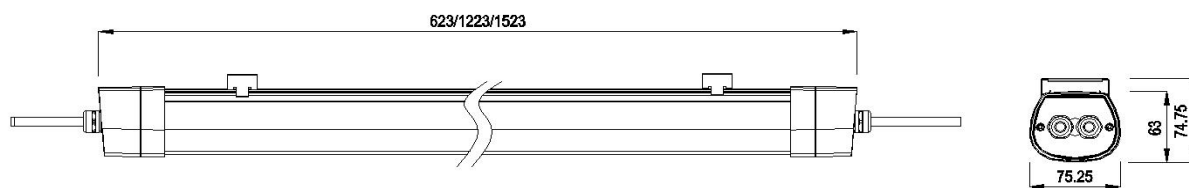

Model	L(Norm)	W(Norm)	H(Norm)	N.W/CTN	G.W/CTN	Qty/CTN	Size/CTN
TBL82F-20W	623mm	75mm	63mm	10.0KG	12.0KG	9PCS/CTN	720*270*230mm
TBL84F-40W	1223mm	75mm	63mm	14.0KG	16.0KG	9PCS/CTN	1320*270*230mm
TBL85F-50W	1523mm	75mm	63mm	18.0KG	20.0KG	9PCS/CTN	1620*270*230mm
TBL85F-60W	1523mm	75mm	63mm	18.0KG	20.0KG	9PCS/CTN	1620*270*230mm

Installation

Suspending



Ceiling Mounted

