

General Description

TUBU's IP69K LED Tri-proof Light L9 are an ideal solution for food processing and poultry lighting industry. The IP69K is the highest level of this protection and is designed for applications where water jets are under high pressure and high temperature are used for specific wash-downs. This will also include special sensitization and chemical cleaning. In some instances, the cleaning process involves very intensive requirements for industries such as Food & Beverage as well as the vehicle industry.

Features

- IP69K & IP67
- PMMA IK06 / PC IK10
- Anti-ammonia
- Against water pressure of 100bar(1450psi) and temperature of 80°C
- System efficiency up to 130lm/W & 150lm/W option
- High CRI >80
- UGR<19 option
- Environmentally friendly, no mercury, No UV, No IR
- Wide beam angle 120°
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- 5 Year Warranty on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE,RoHs Certified


Applications

- Food Processing
- Farm Lighting
- Poultry Lighting
- Warehouse
- Logistic
- Marine Lighting
- Other applications

Electrical and Technical Data

Model No	TBL92F-20W	TBL94F-40W	TBL95F50W	TBL95F60W
Input Power	20W	40W	50W	60W
Dimension	552 * \varnothing 75mm	1152 * \varnothing 75mm	1452 * \varnothing 75mm	1452 * \varnothing 75mm
CCT	4000K & 5000K & 6000K			
CRI	>80			
Power Factor	>0.9			
IP Grade	IP69K			
Input Voltage	AC200-240VAC (50/60Hz)			
Luminous	130lm/W			
Beam Angle	120°			
Working Temp	-40°~45° C			
Warranty	5 Years			
L90	>54,000hrs			


Product Dimension&Package Details

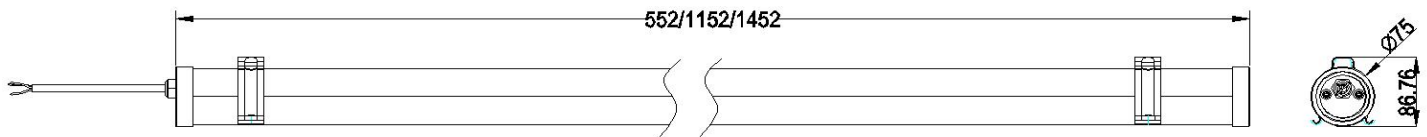

Model	L(Norm)	W(Norm)	H(Norm)	N.W/CTN	G.W/CTN	Qty/CTN	Size/CTN
TBL92F-20W	552mm	75mm	86mm	10.0KG	12.0KG	9PCS/CTN	690*270*270mm
TBL94F-40W	1152mm	75mm	86mm	20.0KG	22.0KG	9PCS/CTN	1290*270*270mm
TBL95F-50W	1452mm	75mm	86mm	18.0KG	20.0KG	6PCS/CTN	1590*270*200mm
TBL95F-60W	1452mm	75mm	86mm	18.0KG	20.0KG	6PCS/CTN	1590*270*200mm

Installation

Surface Mount

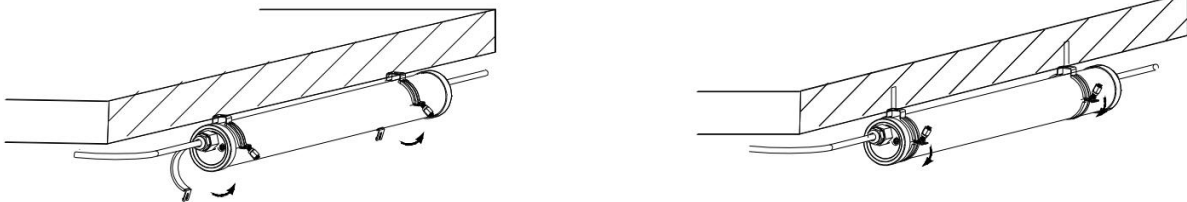

Suspension Mount

