



General Description

TUBU's IP65 LED Tri-proof batten fitting L10 is a performant led luminaire and the ideal replacement for the classic splash-proof luminaires. The reinforced base with polycarbonate cover guarantees an impact resistance of IK08. A device efficiency of 130lm/W is guaranteed thanks to the high efficiency Epistar SMD2835 led chips. It is supplied with lockable stainless steel clips so the device retains its IP65 value even after a long installation time. Both sides of the device are equipped with a toolless connector and 5-pole through-wiring of 1.5 mm² making the luminaire perfectly suitable for line mounting and emergency power circuits. Delivered including stainless steel ceiling

Features

- Easy Install design
- High Output LED's, up to 130m/W
- High CRI >80
- IK10 compact design
- High Transmittance PC cover, no shadow
- Flicker Free driver, High PF>0.96 low THD driver
- Environmentally friendly, no mercury, No UV, No IR
- Linkable Option
- IP65 waterproof, dust, corrosion and pressure-proof, vibration proof; for indoor & outdoor use
- Energy Efficiency Grade: A+
- Quick Start instant 100% luminous flux
- **5 Year Warranty** on complete fixture. (LED's, Driver, & Housing)
- Certificate: CE, RoHS



Applications

- Car parking Lighting
- School Lighting
- Workshops
- Supermarket
- Warehouse
- Storage



Electrical and Technical Data

Model No	TBL10A4F-40W-S	TBL10A5F-50W-S	TBL10B4F-55W-S	TBL10B5F-65W-S
Input Power	40W	50W	55W	65W
Dimension	1200*90*80mm	1500*90*80mm	1200*120*86mm	1500*120*86mm
CCT	3000K 4000K 5000K 6000K		3000K 4000K 5000K 6000K	
CRI	>80	>80	>80	>80
Power Factory	>0.9	>0.9	>0.9	>0.9
IP Grade	IP65	IP65	IP65	IP65
Input Voltage	200-240VAC	200-240VAC	200-240VAC	200-240VAC
PC Cover	Milky	Milky	Milky	Milky
Lumen Efficacy	130lm/W	130lm/W	130lm/W	130lm/W
Luminous	5000~5200lm	6200~6500lm	6600~7150lm	7800~8450lm
Beam Angle	120°	120°	120°	120°
Working Temp	-20°-50°	-20°-50°	-20°-50°	-20°-50°
Warranty	5 Years	5 Years	5 Years	5 Years
Lifespan	L90> 54,000hrs	L90> 54,000hrs	L90> 54,000hrs	L90> 54,000hrs

Product Dimension&Package Details

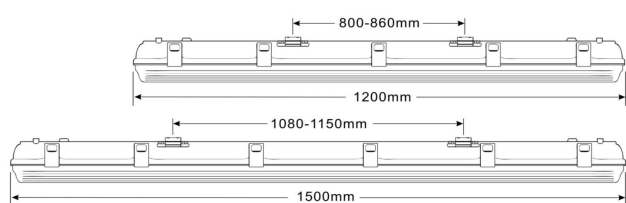

TBL10A4F-40W-S & TBL10A5F-50W-S

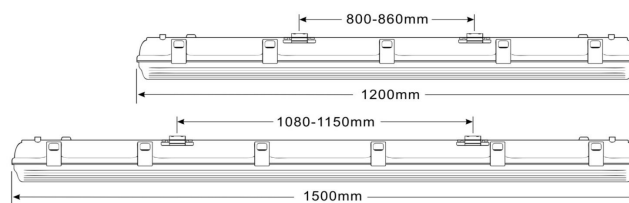

TBL10B4F-55W-S & TBL10B5F-65W-S

Model	A(Length)	D(Width)	C(Height)	N.W/CT	G.W/CT	Qty/CTN	Size/CTN
TBL10A4F-40W-S	1200mm	90mm	80mm	14.6KG	19.5KG	9PCS/CTN	1280*335*290mm
TBL10A5F-50W-S	1500mm	90mm	80mm	17.0KG	22.0KG	9PCS/CTN	1580*335*290mm
TBL10B4F-55W-S	1200mm	120mm	86mm	14.6KG	19.5KG	6PCS/CTN	1280*290*310mm
TBL10B5F-65W-S	1500mm	120mm	86mm	17.0KG	22.0KG	6PCS/CTN	1580*290*310mm

Installation

Suspending



Ceiling Mounted

