



General Description

TUBU's LED eyelid bulkhead light features rugged design and versatility to make it an excellent choice for new construction or retrofit applications. Offered in a variety of versions and color temperatures, it is suitable for coastal use, is corrosion resistant and has a 3 year warranty.

Features

- Size: 300*94mm
- Voltage: AC100-AC240V / 50-60Hz
- Power: 12W PF: > 0.90
- LEDs Type: Epistar Chips SMD5630 LED
- Lumens: 900lm
- Beam Angle: > 120° CRI: > 80
- Material: Polycarbonate PC base + Opal PC diffuser
- 30% light on in 3hr emergency with 9.6V 1000mAh Ni-MH battery
- Microwave sensor 0%-100%
- CCT: 3000K-3500K / 4000K-4500K / 6000K-7000K Lifespan: 50,000hrs, CE-EMC, LVD & RoHS compliant
- Weatherproof: IP65
- 3 year warranty


Applications

- Wall Lighting
- Garden Lighting

Electrical and Technical Data

Model No	MG-BHLRE-12W-S	MG-BHLRE-12W-M	MG-BHLRE-12W-E	MG-BHLRE-12W-M&E
Version	Standard	Microwave	Emergency	Microwave&Emergency
Input Power	12W	12W	12W	12W
Dimension	Ø300*94mm	Ø300*94mm	Ø300*94mm	Ø300*94mm
CCT	3000K/4000K	3000K/4000K	3000K/4000K	3000K/4000K
CRI	>80	>80	>80	>80
Power Factor	>0.9	>0.9	>0.9	>0.9
IP Grade	IP65	IP65	IP65	IP65
Input Voltage	AC100~240V	AC100~240V	AC100~240V	AC100~240V
Luminous	70lm/W	70lm/W	70lm/W	70lm/W
Beam Angle	120°	120°	120°	120°
Working Temp	-20°-50°	-20°-50°	-20°-50°	-20°-50°
Warranty	3 Years	3 Years	3 Years	3 Years
Lifespan	50000H	50000H	50000H	50000H

Product Dimension&Package Details

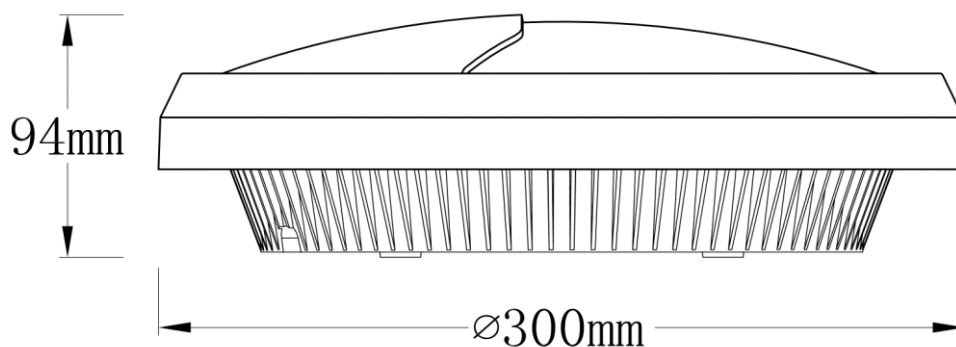

Model	Diameter(Norm)	Height(Norm)	N.W/PC	G.W/PC	Qty/CTN	Size/CTN
MG-BHLRE-12W	300mm	94mm	9.3KG	11.3KG	6PCS/CTN	625*350*320mm